

Sealers -

Sealing protects the beauty and durability of your new concrete. There are three options.

High-gloss, our most popular, produces a sheen and luster as seen in the photo to the right. Other sealing options are medium-gloss and no-gloss.



Photo courtesy of BASF, Inc.

This patio was integrally colored with Caramel and stamped with the Fractured Earth pattern. The border was colored with Coffee Bean.



Concrete Dispatch
Ph. (708) 535-4101

Three Plant Locations to Serve You
Oak Forest | Frankfort | Sauk Village



Wille Brothers Company
Ready Mix Concrete
Concrete Division Main Office
15800 S Lamon
Oak Forest, IL 60452
Ph. (708) 687-4000
Fax (708) 687-8652

Learn more and see additional photos at willebrothers.com

The color
of concrete
is changing...



Patios | Steps | Courtyards | Pool Decks | Driveways | Interior Floors | Sidewalks
willebrothers.com

Colored Concrete -

Homeowners are looking for the latest and most innovative design trends for their building projects. Whether it's new construction, an addition, or an improvement project, decorative concrete is a great way to add value and increase the beauty of any home.



The natural base color of concrete, finishing and curing method determines final color. Different cements, sand, rock, mixing and job-site conditions and contractor technique can alter color from this card. Concrete is produced from natural materials. Surface variation common to uncolored concrete can impact colored concrete.

Stamp Patterns -

Add texture and style

Canyon Stone - Random Interlocking Pattern



Khaki with Adobe release

Fractured Slate - Random Interlocking Pattern



Khaki with Walnut release

Ashler Stone - Random Interlocking Pattern



Caramel with Adobe release

Used Brick - Running Bond Pattern




Brick Red with Dark Gray release

Cobblestone - Random Interlocking Pattern



Steel Gray with Dark Gray release

Fractured Earth - Embossing Skin

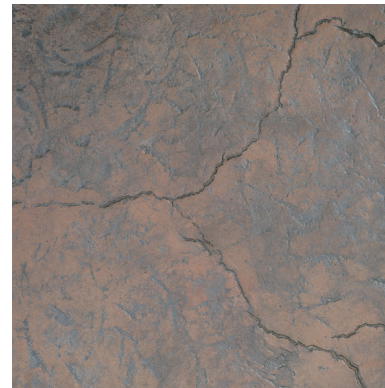

Tan Saddle with Storm Gray release

Release Agents -

Release agents bring an antique-look to the concrete and are applied on top of the concrete in an amount you and your contractor will determine together.

